




How to Layout a Baseball Diamond


1. Locate Home Plate and Secure
2. Secure Tape Measure 0'-0" Mark Behind Tip of Home Plate (with a spike)
3. Measure Straight Out to Pitching Rubber and Second Base, Establishing the Diamond Direction (ex: PeeWee Diamond Pitching Rubber at 48'-0", Second Base at 99'-0")
4. Expand Tape Measure to Double the Measurement of Baseline Distance and First Person Holds that Distance Mark at Second Base (ex: PeeWee Diamond 70'-0" Baseline Distance – Hold 140'-0" Mark at Second Base)
5. Second Person Grabs Baseline Distance Mark of Tape Measure (mid point or 70'-0") and Stretches that Back Towards First Base and Marks that Location (ex: PeeWee Diamond 70'-0" Baseline Distance Mark)
6. Second Person Still Holding the Baseline Distance Mark (ex: 70'-0") then Walks Towards Third Base and Marks that Location while First Person Continues to Hold Double Distance (ex: 140'-0") Mark at Second Base
7. First Person Reels In Tape Measure and Removes Spike From Tip of Home Plate
8. You Now Have a Perfectly Laid Out Ball Diamond

Bases Layout Diagram

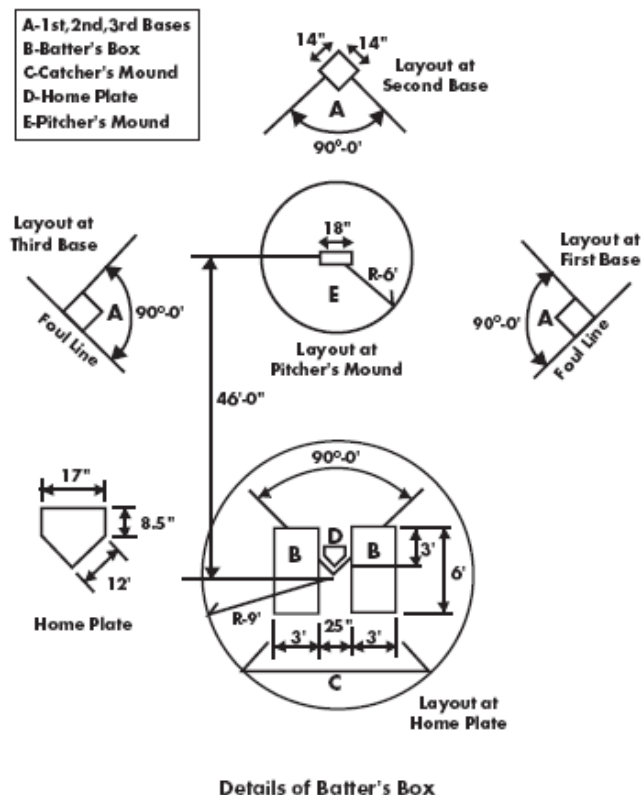




Mosquito Diamond Layout

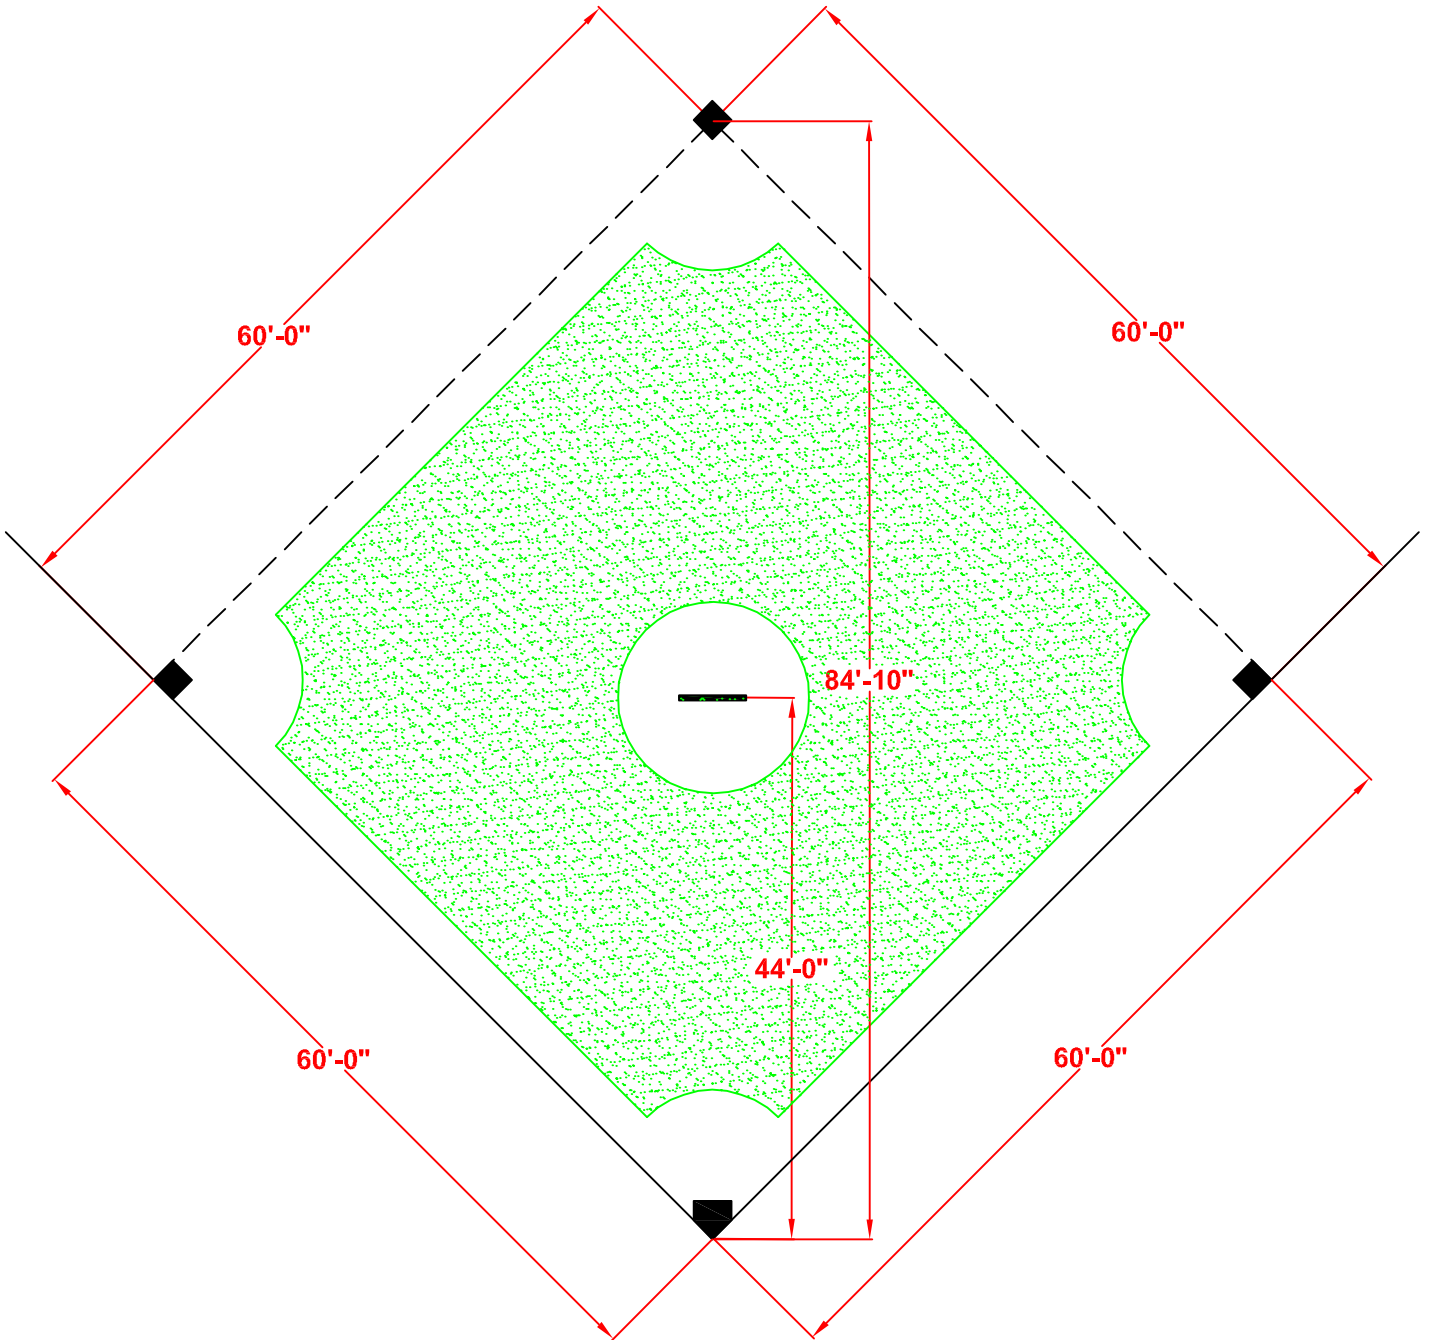




PeeWee Diamond Layout

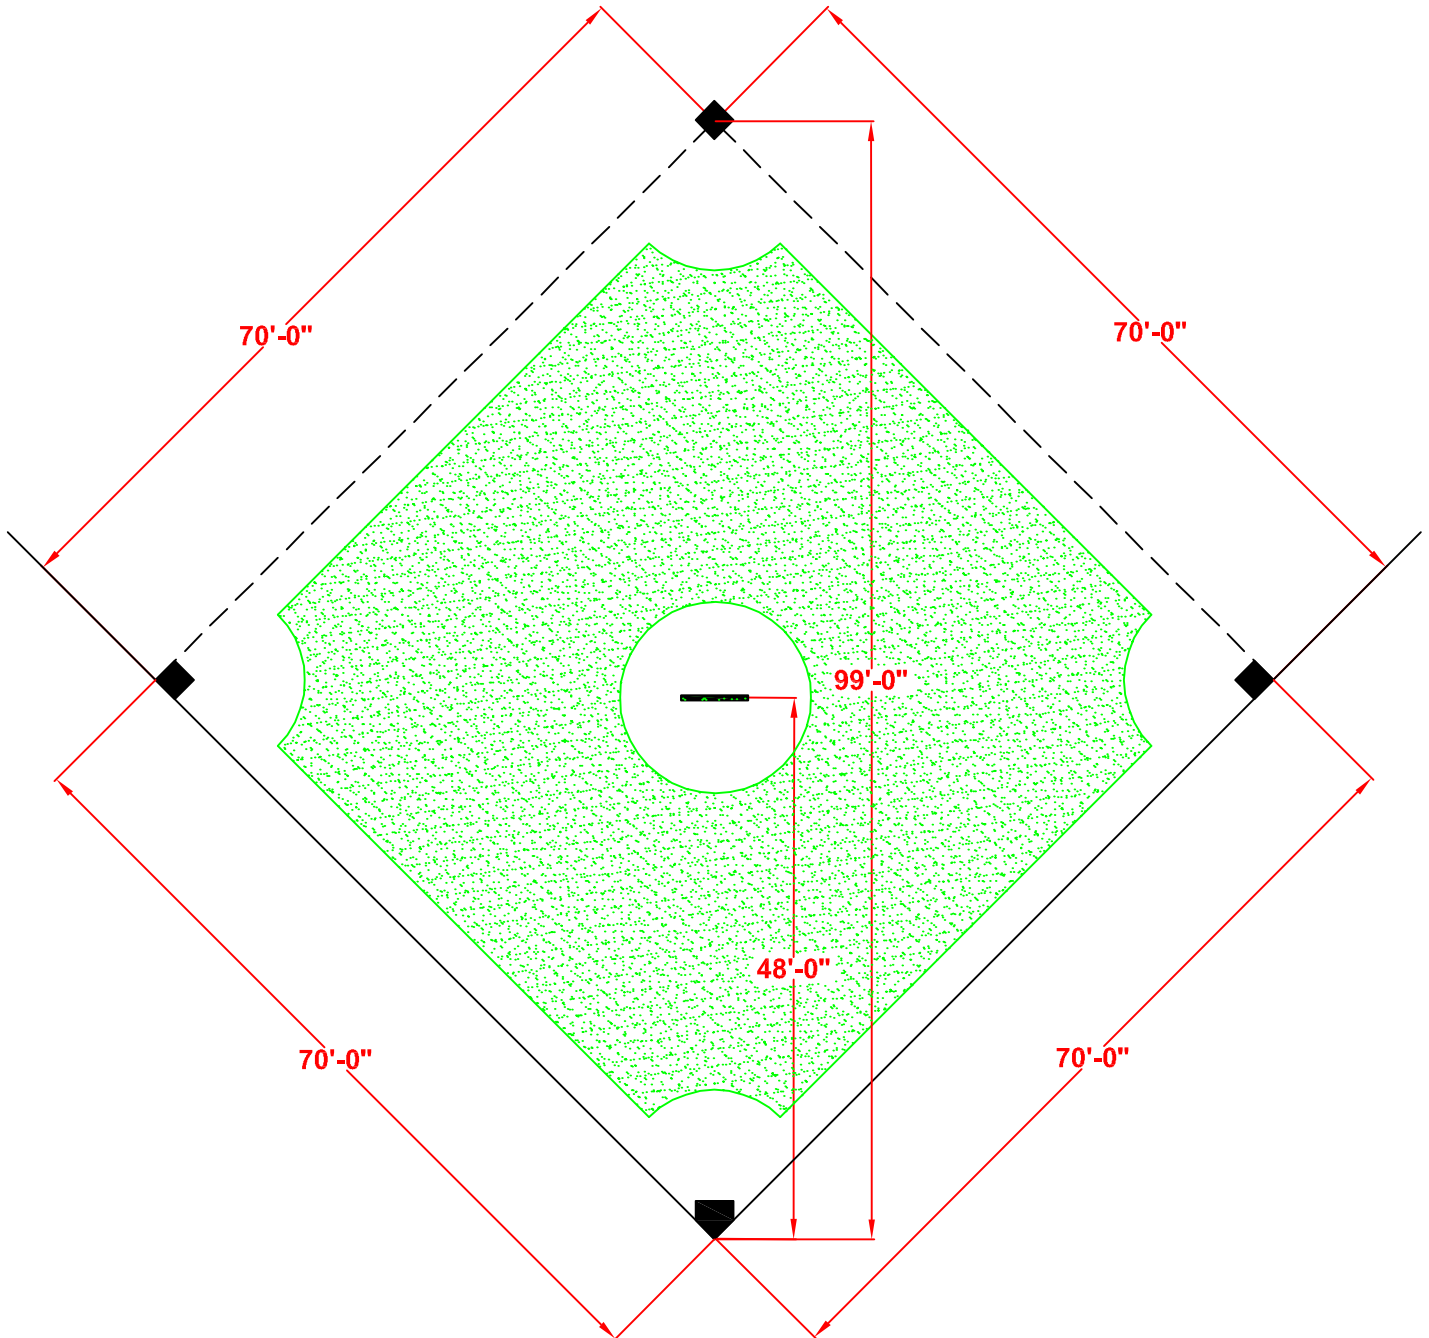



Bantam Diamond Layout

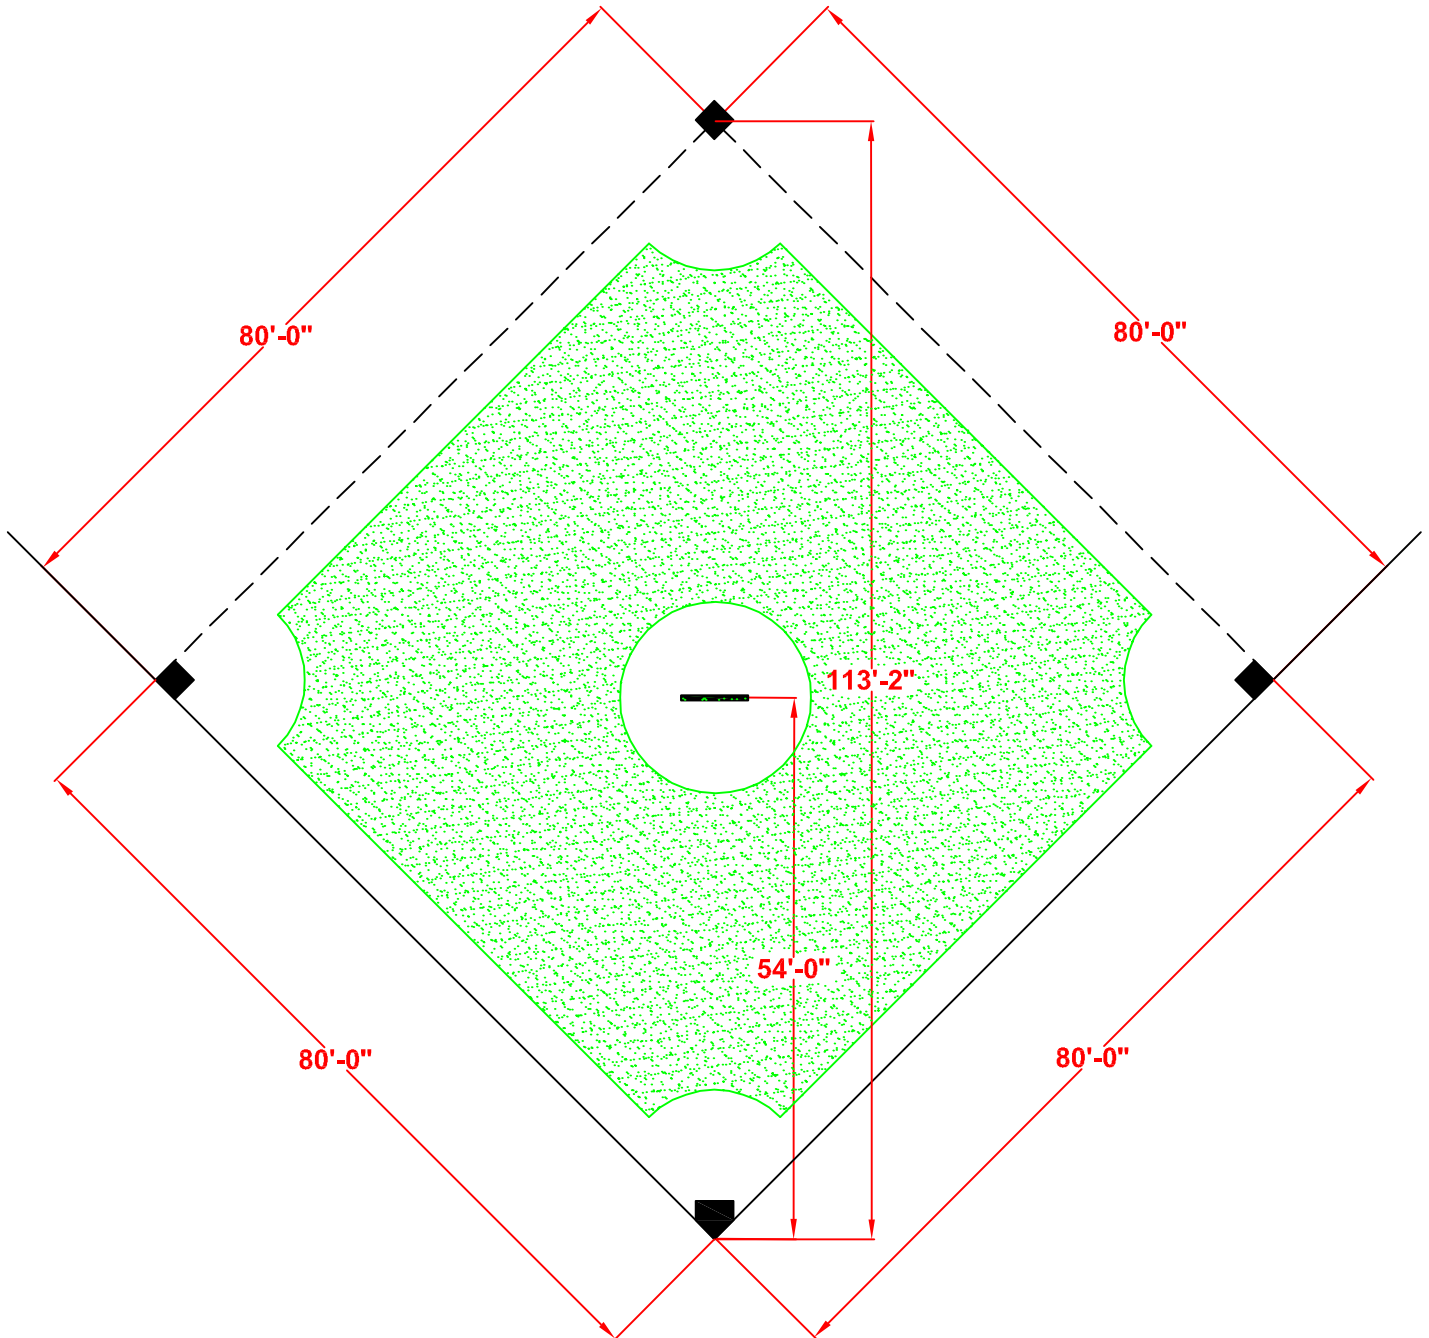



Midget Diamond Layout

